

**DS-KA-RL1E2
Relay Module**

- Support controlling the relay to trigger the lock and lightings.
- Manual settings with rotary switch


▪ **Specification**

Device interfaces	
Alarm input	2
Network interface	/
Two-Wire interface	2, 1 for input 1 for output
Power interface	48 V , powered by DS-KAD7060EY or DS-KAD7061EY
General	
Button	Reset Button
Power consumption	≤ 4 W
Indicator	3 (IN, OUT, ERROR)
Working temperature	-10 °C to 55 °C (14 °F to 127 °F)
Working humidity	10% to 90% (no-condensing)
Dimension (W × H × D)	52.5 mm × 104 mm × 42.1 mm (2.07" × 4.09" × 1.66")
Installation	Rail mounting, screw mounting

▪ **Available Model**

DS-KA-RL1E2

▪ **Dimension**

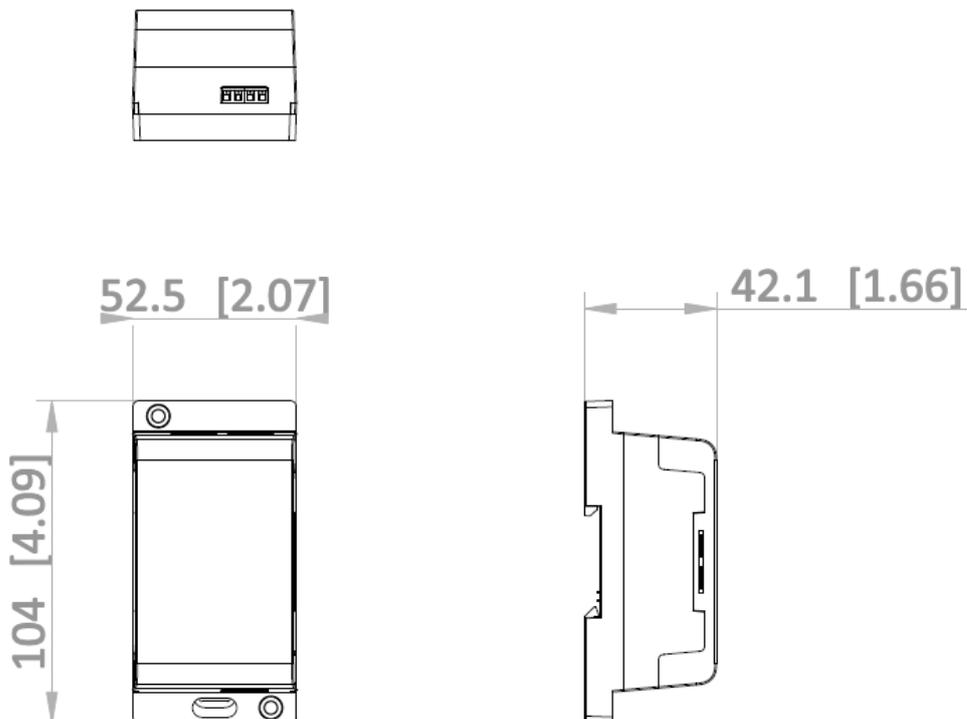

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.

